

mac-lander
OSCEOLA, IOWA




T
R
A
I
L
E
R
S

The Standard for Quality!

The Standard for Quality!

A detailed look at a Mac-Lander Trailer reveals the solid construction inside and out. Mac-Lander incorporates the highest quality materials, workmanship and unique features to build the trailers that set the standard for quality.

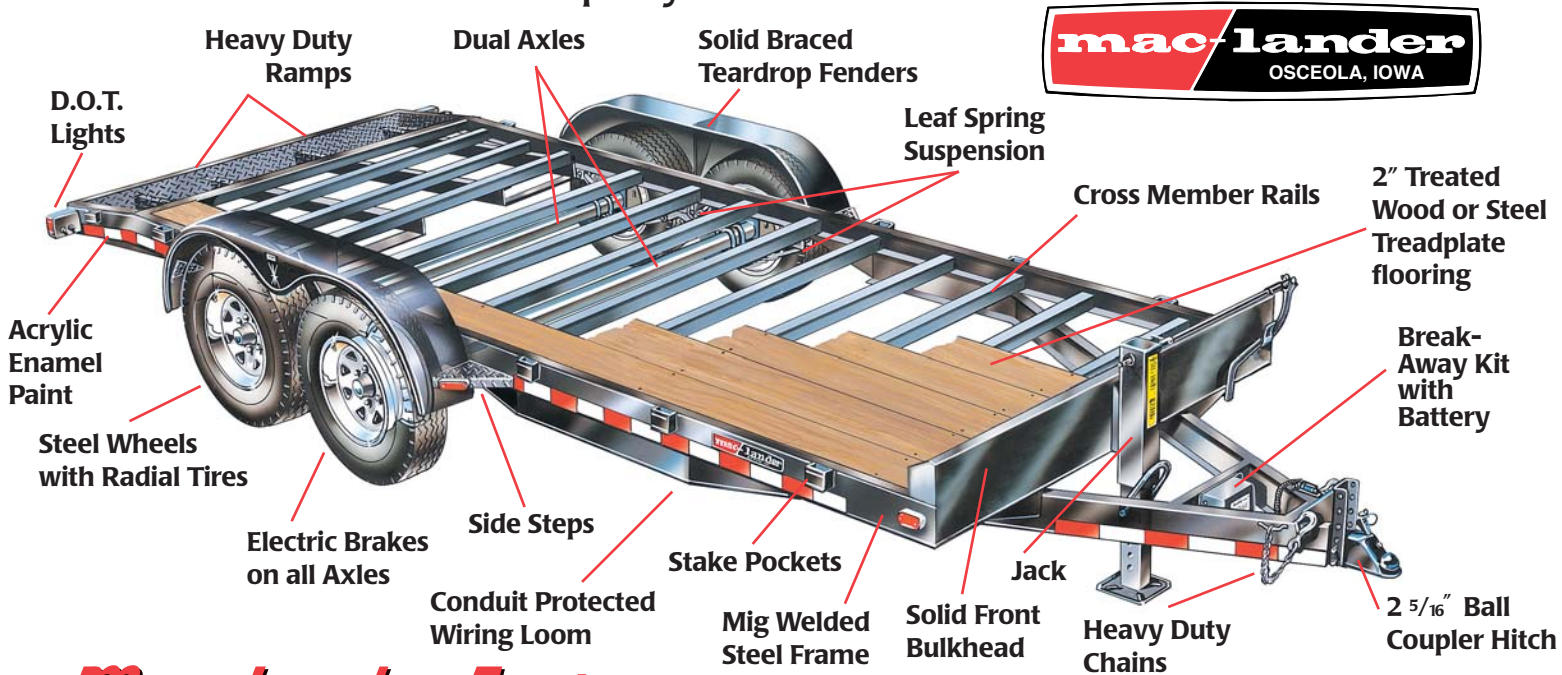

Mac-Lander Features

- Electric brakes on all axles
- Wiring loom protected in conduit
- Solid gusset on enclosed fenders
- Frame cross members designed for increased strength
- Safety brake-away kit with battery
- Premium radial tires
- Reliable sealed beam tail lights
- Fully primed and painted with acrylic enamel and hardner
- Leaf spring suspension
- 5 foot heavy duty ramps
- Frames are Mig welded in fixtures
- Rugged structural frame
- Heavy duty safety chains
- 2" pressure treated wood floors

Features that make a difference!



FM, FH & SL Series equipped with "Roughneck" diamond plated fenders.



All Mac-Lander trailers are equipped with conduit enclosed wiring loom and safety brake-away kit with battery.



FH and SL Series equipped with heavy duty spring assist jack.



DO Series equipped with protected and recessed tail lights.



E-Z Crank Beavertail.



All tag-alongs equipped with reliable sealed beam tail lights.

Skid Loader Series

Skid Loader Series

14' & 16' Model 9,990# GVWR with 6K drop axles,
18' Model 12,000# GVWR or
14,000# GVWR with 7K drop axles,
heavy duty jack, flip-up ramps,
16" cross member spacing.

Models:

14TSLWB

16TSLWB

18TSLWB



Frame Heavy Series



Frame Heavy Series

12,000# GVWR or 14,000# GVWR with 7K drop axles,
16" radials, 8 bolt hubs, heavy duty jack, 6" channel frame and tongue.

Models: 20TFHWS 20TFHSB 20TFHWB

20GFHWS 20GFHSB 20GFHWB

Frame Standard Series



Frame Standard Series

7,000# GVWR, 4" channel tongue, 15" radial tires.

Models: 16TFSWS 18TFSWS 18TFSWB 18TFSSB 18TFRSB



Frame Medium Series



Frame Medium Series

9,990# GVWR with 6K axles, 15" radials, 8 bolt hubs, 5" channel frame and tongue.

Models: 20TFMWS 20TFMWB 18TFMWS 18TFMWB 18TFMSB

20' Frame Heavy Tilt Bed

12,000# GVWR or 14,000# GVWR with 7K drop axles, 12 volt electric/hydraulic power system, 8 bolt hubs, heavy duty jack, 6" channel frame and tongue. Rear 16' tilts, front 4' stationary. 10° loading angle.

Model: 20TFHWT



18' Frame Medium Tilt Bed

9,990# GVWR with 6K drop axles, 12 volt electric/hydraulic power system, 8 bolt hubs and heavy duty jack, 5" channel frame and tongue.

Full 18' tilt. Low 20" floor height.

Model: 18TFMWT



Deck Over Series

14,000# GVWR to 21,000# GVWR with 7K straight axles, available in tag along or goose neck. Features E-Z crank beavertail, tandem or triple axles, 16" radial tires, 8 bolt hubs.

Models: 25TDOWC 25GDOWM 29TTAWC 29GTAWC



Tandem Dual Series

25,900# GVWR, available in tag along or goose neck with straight deck or beavertail. Features 2 speed double drop leg landing gear jack, lengths of 25, 29 and 33 feet, oil bath bearings, 16" radial tires and fold-over ramps. Fabricated pierced flanged beam frame for low floor height.

**Models: 25TTDWC 29TTDWC 33TTDWC
25GTDWC 29GTDWC 33GTDWC**



Tandem Dual Heavy Series

32,000# GVWR, 25' tag type with 16K straight air brake axles, oil bath bearings, 2 speed double drop leg landing gear, 17.5" tires, fabricated pierced flanged beam frame with reinforced cross members and ramps.

Model: 25TTHWC

